

# Features & Specifications



**Double Wall Construction with 1 1/2" Air Space**  
(NFPA 30, OSHA, FM 6050)

**Large Warning Label, (also available in French and Spanish)**  
(NFPA 30, OSHA 1910.106, FM 6050)



**Fusible Link Assembly on Self-Closing Models**

**Flush Mounted Locking Handle**




**Non-sparking closure w/ 3-Point, Self-Latching Doors**  
(NFPA 30, OSHA 1910.106, FM 6050)

**Structurally Reinforced 18-Gauge All-Welded Construction**  
(NFPA 30, OSHA 1910.106, FM 6050)



**Static Ground Connections**  
(FM 6050, OSHA, NFPA 70)


**Continuous Piano Hinge**



**Leak Proof Sill 2" Deep, Prevents Leakage in the Event of Accidental Spills**  
(NFPA 30, OSHA 1910.106, FM 6050)

**Finished in Chemical, UV & Impact Resistant Urethane**

**Adjustable Zinc Plated Leveling Legs**



## SAFETY BEGINS WITH SECURALL®

SECURALL®'s innovative design features and conscientious customer service continue to be the benchmark of excellence in the safety storage industry.

Our dedication to quality, delivery and manufacturing efficiencies has established SECURALL® as an industry leader in safety storage cabinets and buildings, while our commitment to customers' needs has resulted in the most comprehensive line of safety storage products available.

If you have a special situation that requires a customized design, we will welcome the opportunity to work with you to provide a safe storage solution.

Make SECURALL® your primary source for quality safety storage and security products.

# Containment Classifications



## NFPA FLAMMABLE & COMBUSTIBLE CLASSES

FLAMMABLES	Flash Point	Boiling Point	COMBUSTIBLES	Flash Point	Boiling Point
Class IA	<73F (22.8C)	<100F (37.8C)	Class IIA	<100F (37.8C) and <140F(60C)	-
Class IB	<73F (22.8C)	<100F (37.8C)	Class IIIB	<140F (60C) and <200F(93C)	-
Class IC	<73F (22.8C) and <100F(37C)	-	Class IIIC	<200F (93C)	-

A maximum of 120 - gallons of Class I, Class II, and Class IIIA liquids may be stored in a single storage cabinet.<sup>1</sup> The number of cabinets in a single fire area may not exceed 3. Proper storage of additional cabinets within a single fire area is limited to groups no larger than 3, so long as a minimum of 100ft separation exists between all groups. The maximum number of cabinets in any one group may be increased to 6 if the cabinets are stored in an Industrial Occupancy facility that is equipped with an automatic sprinkler system meeting NFPA 13 standards for installation.<sup>1</sup>

SECURALL® utilizes a 3-point, non-sparking button latch rod system that provides the ultimate in security, safety and compliance. Since all work surfaces are not level, each cabinet is equipped with (4) **Leveling Legs** to level the cabinet and doors for successful closure every time (see *Figure 1*).

Additionally, all **Self-Close Door** models are equipped with Fusible Links to hold doors open while accessing contents of cabinet. When properly used, links are designed to melt at 165°F, which allows the doors to close automatically in case of fire (see *Figure 2*).

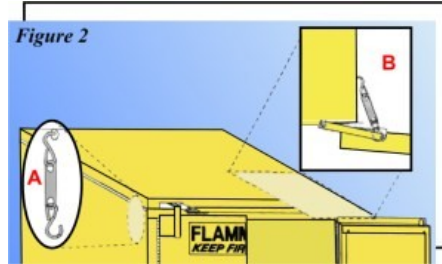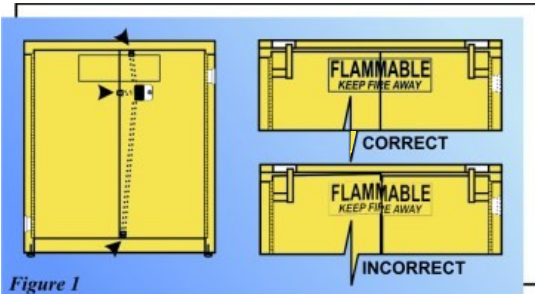

- A:** Insert one end of fusible link hook into desired punch-hole
- B:** Attach other end of link assembly as indicated in


## Paint

The interior and exterior finish consists of an aliphatic polyurethane finish. This polyurethane coating has chemical properties to withstand salt spray, chemical rub, fading due to UV exposure and other tests performed on epoxy paints. Urethane is more durable under conditions when moving items in and out of the cabinet as it resists chipping and peeling. Unless some other color is specified, cabinets will ship in designated standard color. For **custom colors**, customer must provide a paint chip.




## Door Configuration

**Self-Latch, Standard 2-Door**  
Denoted as a 100 series model no.



**Self-Close, Self-Latch Sliding Door**  
Denoted as a 200 series model no.

**Self-Close, Self-Latch Safe-T-Door**  
Denoted as a 300 series model no.

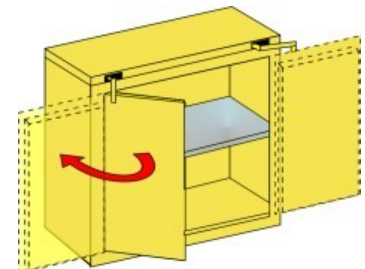

# Flammable Storage - Cans

Keep flammable liquids close to the work area in a safe and organized way while limiting employee exposure with SECURALL® Safety Storage Cabinets. You can choose from a large selection of sizes from 4 to 90-gallon capacities. These cabinets are designed to meet safety requirements whenever a job involves the handling of flammable or combustible liquids. Smaller cabinets are convenient where space is limited. Standard color is Yellow.

**All cabinets comply with current OSHA regulations and are designed in accordance with the standards of NFPA Code 30.**



★ Model #A145



Model #A230



Model #A305

## CABINETS FOR STORING FLAMMABLES IN SAFETY CANS/CONTAINERS

Model No.	Test Lab Approv.	Description	No. of Shelves	Exterior Dim. (H" x W" x D")	Approx. Ship Wt.	Addtn'l Shelf	Approx. Ship Wt.
A102	*~	4 Gal. Self-Latch Standard Door	1	22 x 17 x 17	75 lbs.	S17-05	3 lbs.
A302	*~	4 Gal. Self-Close, Self-Latch Safe-T-Door	1	24 x 17 x 17	82	S17-05	3
A105	FM*~	12 Gal. Self-Latch Standard Door	1	35 x 24 x 18	138	S1-05	5
A305	FM*~	12 Gal. Self-Close, Self-Latch Safe-T-Door	1	37 x 24 x 18	148	S1-05	5
A110	FM*~	16 Gal. Self-Latch Standard Door	1	44 x 24 x 18	164	S1-05	5
A310	FM*~	16 Gal. Self-Close, Self-Latch Safe-T-Door	1	46 x 24 x 18	174	S1-05	5
A130	FM*~	30 Gal. Self-Latch Standard 2-Door	1	44 x 43 x 18	247	S2-05	12
A230	FM*~	30 Gal. Self-Close, Self-Latch Sliding Door	1	44 x 43 x 18	252	S2-05	12
A330	FM*~	30 Gal. Self-Close, Self-Latch Safe-T-Door	1	46 x 43 x 18	267	S2-05	12
A131	FM*~	30 Gal. Self-Latch Standard 2-Door	1	35 x 36 x 24	220	S15-05	13
A231	*~	30 Gal. Self-Close, Self-Latch Sliding Door	1	35 x 36 x 24	223	S15-05	13
A331	FM*~	30 Gal. Self-Close, Self-Latch Safe-T-Door	1	37 x 36 x 24	235	S15-05	13
A145★	FM*~	45 Gal. Self-Latch Standard 2-Door	2	65 x 43 x 18	337	S2-05	12
A245	FM*~	45 Gal. Self-Close, Self-Latch Sliding Door	2	65 x 43 x 18	342	S2-05	12
A345	FM*~	45 Gal. Self-Close, Self-Latch Safe-T-Door	2	67 x 43 x 18	357	S2-05	12
A160	FM*~	60 Gal. Self-Latch Standard 2-Door	2	65 x 31 x 31	372	S3-05	17
A260	*~	60 Gal. Self-Close, Self-Latch Sliding Door	2	65 x 31 x 31	377	S3-05	17
A360	FM*~	60 Gal. Self-Close, Self-Latch Safe-T-Door	2	67 x 31 x 31	394	S3-05	17
A190	FM*~	90 Gal. Self-Latch Standard 2-Door	2	65 x 43 x 31	443	S4-05	21
A290	*~	90 Gal. Self-Close, Self-Latch Sliding Door	2	65 x 43 x 31	448	S4-05	21
A390	FM*~	90 Gal. Self-Close, Self-Latch Safe-T-Door	2	67 x 43 x 31	473	S4-05	21

## Caster Assembly



Casters are constructed of heavy gauge galvanized steel; each assembly provides a wide, sturdy base and enables cabinets to be moved from one area to another safely, without tipping over. Each assembly set comes with one pair of rigid locking casters and one pair of swivel locking casters. Casters are available in colors to match all SECURALL® Safety Cabinet colors.



### CABINET ACCESSORIES

Model No.	Description	Approx. Ship. Wt.
CA18	Caster Assembly for cabinets 18" deep	30
CA31	Caster Assembly for cabinets 31" deep	36

\* Complies with OSHA Regulations FM Factory Mutual Tested and Approved  
 ~ Designed in Accordance with Specifications set forth by the National Fire Protection Association