


# ARS18PVDL2B

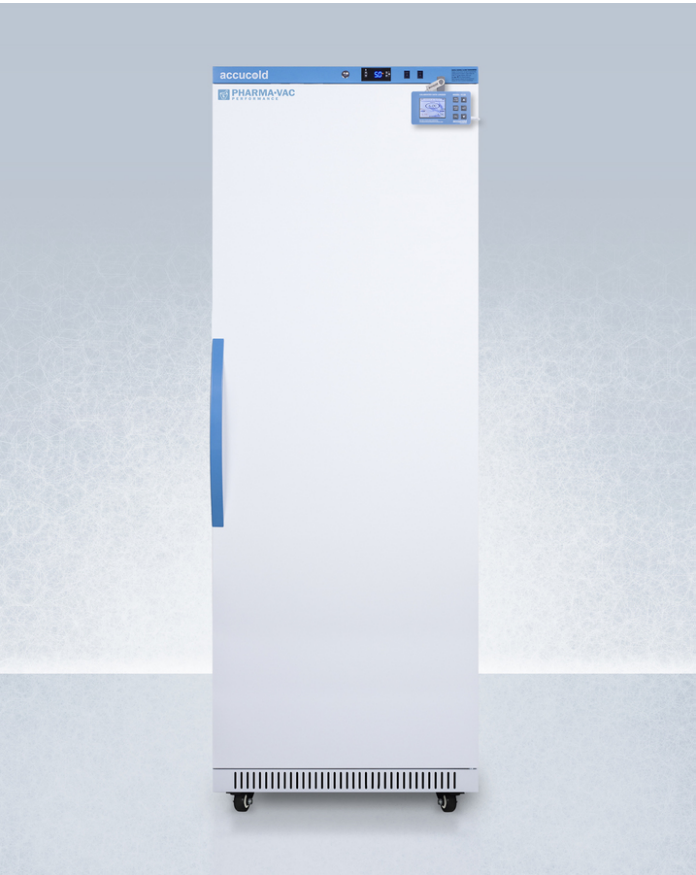

78.5" x 27.5" x 26" (H x W x D)

Performance series Pharma-Vac 18 cu.ft. upright all-refrigerator for vaccine storage, with factory-installed data logger, antimicrobial silver-ion handle, and hospital grade cord with 'green dot' plug

**Highlights:**

- NIST calibrated DDL included for accurate temperature logging
- Intelligent microprocessor digital temperature controller
- Improved temperature accuracy with a separate temperature probe for continuous product readout to simulate stored product temperature

**Product Features:**

|   |  |
|---|--|
| Purpose-built design                            | Designed and purpose-built for pharmacy, medication, and vaccine applications to support meeting CDC/VFC guidelines  |
| +/-1°C Variation                                | The published temperature variation is derived from the maximum deviation of an NTC sensor in a 1 oz. vial located nearest the chamber geometric center during a 24 hour test period   |
| Digital data logger (DDL) included              | Accucold DL2B data logger is NIST calibrated in our ISO/IEC 17025:2017 laboratory, with user-set logging intervals, a large LCD readout of the current and high/low temperature, and virtually unlimited storage through internal memory and a convenient USB drive; for additional information on this logger's features, view the DL2BKit on our website |
| Antimicrobial silver ion-coated handle          | Powder-coated handle with naturally occurring silver ions to help reduce the spread of germs   |
| Adjustable temperature                          | Intuitive controls let you adjust the interior temperature between +2 to +8°C  |
| Temperature alarm                               | Visual and audible alarms alert if the interior temperature rises or falls out of set range  |
| Remote alarm contacts                           | Electronic controller is equipped with a volt-free contact for alarm forwarding to an external remote system (contacts located in the external rear of the unit)   |
| Automatic defrost with adjustable cycle defrost | Adjustable cycle defrost operation ensures the unit avoid temperature spikes and ice buildup   |

## ARS18PVDL2B Specifications:

| Overview                   |                     |
|----------------------------|---------------------|
| Height of Cabinet          | 78.5" (199 cm)      |
| Width                      | 27.5" (70 cm)       |
| Width with Door Open       | 28.0" (71 cm)       |
| Depth                      | 26.0" (66 cm)       |
| Depth with Handle          | 27.75" (70 cm)      |
| Depth with door at 90°     | 52.0" (132 cm)      |
| Capacity                   | 18.0 cu.ft. (510 L) |
| Defrost Type               | Automatic           |
| Door                       | White               |
| Cabinet                    | White               |
| US Electrical Safety       | ETL                 |
| Canadian Electrical Safety | ETL-C               |
| Amps                       | 1.5                 |
| Voltage/Frequency          | 115 V AC/60 Hz      |
| Weight                     | 270.0 lbs. (122 kg) |
| Parts & Labor Warranty     | 2 Years             |
| Compressor Warranty        | 5 Years             |
| UPC                        | 761101084626        |
| Refrigerator Features      |                     |
| Door Swing                 | RHD                 |
| Reversible                 | Factory Reversible  |
| Shelf Type                 | Wire                |
| Shelf Qty                  | 7                   |
| Adjustable Shelves         | Yes                 |
| Thermostat Type            | Digital             |
| Fan Type                   | Interior            |
| Refrigerant Type           | R290a               |
| Refrigerant Amount         | 1.75oz.             |
| High Side PSI              | 280.0               |
| Low Side PSI               | 90.0                |
| Wheel Qty                  | 4                   |
| Interior Light             | Yes                 |
| Temperature Range          | 2 to 8°C            |
| Dimensions                 |                     |
| Interior Height            | 68.5" (174 cm)      |
| Interior Width             | 24.13" (61 cm)      |
| Interior Depth             | 18.75" (48 cm)      |

|                        |                |
|------------------------|----------------|
| Compressor Step Height | 6.5" (17 cm)   |
| Compressor Step Width  | 24.13" (61 cm) |
| Compressor Step Depth  | 6.5" (17 cm)   |

