

## PRODUCT DATA SHEET

Published: 2026-03-18

LAUDA Universa U 830 E

Cooling thermostat 220-240 V; 50/60 Hz

Part Number: L003971

### Features

- Bath circulation thermostat for standard temperature control tasks up to 100 °C – reliable and intuitive to use.
- Future-proof thanks to modularity: LAUDA Universa with interchangeable control head and heating/cooling base allows flexible adaptation to current and future requirements.
- Bright VA LC display with clear two-line display and intuitive 3-button operation.
- Reliable circulation pump with flow reduction for adjusted volume flow and constant pressure.
- Energy-efficient refrigeration system: capillary tube technology with speed-controlled inverter compressor and speed-controlled fan - for reduced energy costs and a long service life.
- Environmentally friendly refrigerants: Use of natural refrigerants for sustainable and environmentally conscious cooling.
- Integrated timer with countdown function for time-controlled temperature control processes.
- Intelligent remote control and monitoring: Integrated web server allows flexible remote control in the company network via the LAUDA Command app or browser-based, secured by PKI and 2-factor authentication. The connection to LAUDA.LIVE enables global, cloud-based data analysis and remote maintenance.
- Modern connectivity thanks to standard integrated Ethernet and USB interfaces for reliable data communication.
- Wireless communication: Integrated WLAN enables effortless connection with PC, tablet and smartphone.
- Proven safety features: low-level and overheating protection for operation with non-flammable liquids, audible and visual alarm signals.



Reserve technical changes

### Options included

- Integrated Wi-Fi communication: The device may only be imported and used in certified countries and regions: United States of America, Canada, EU including the UK and Switzerland, and India.

# PRODUCT DATA SHEET

Published: 2026-03-18

LAUDA Universa U 830 E

Cooling thermostat 220-240 V; 50/60 Hz

Part Number: L003971



Working temperature min.  
-30 °C



Working temperature max.  
100 °C

## Technical Features

Working temperature range	-30 ... 100 °C
Operating temperature range	-30 ... 100 °C
Ambient temperature range	5 ... 40 °C
Temperature stability	0.05 ± K
Heating capacity range	1.6 ... 2.2 kW
Power consumption max.	2.4 kW
Current max.	10 A
Size of bath (W x D x H)	150 x 150 x 200 mm
Bath opening (WxT)	150 x 150 mm
Bath volume min. / max.	6.4 / 8.5 L
Pump Pressure max.	0,2 bar
Pump flow rate max. (pressure)	15 L/min
Overall dimensions (WxDxH)	260 x 480 x 630 mm
Weight	28 kg
Refrigerant stage 1	R-600a (GWP 3); 0.030 kg; 0.0 t CO2-eq
Power supply	220-240 V; 50/60 Hz
Power plug	Power cord with angled plug (CEE7/7)

Reserve technical changes


## PRODUCT DATA SHEET

Published: 2026-03-18

LAUDA Universa U 830 E

Cooling thermostat 220-240 V; 50/60 Hz

Part Number: L003971



Power cord with angled plug (CEE7/7)

Temperature	Heat transfer liquid	Cooling Capacity 50 Hz	Cooling Capacity 60 Hz
20 °C	Ethanol	0.3 kW	0.3 kW
10 °C	Ethanol	0.275 kW	0.275 kW
0 °C	Ethanol	0.23 kW	0.23 kW
-10 °C	Ethanol	0.175 kW	0.175 kW
-20 °C	Ethanol	0.1 kW	0.1 kW
-30 °C	Ethanol	0.01 kW	0.01 kW

Reserve technical changes

### Standard accessories

- 1 Bath cover

## PRODUCT DATA SHEET

Published: 2026-03-18


LAUDA Universa U 830 E

Cooling thermostat 220-240 V; 50/60 Hz

Part Number: L003971

### COOLING PERFORMANCE Heat transfer liquid: Ethanol, bath closed

Bath temperature °C

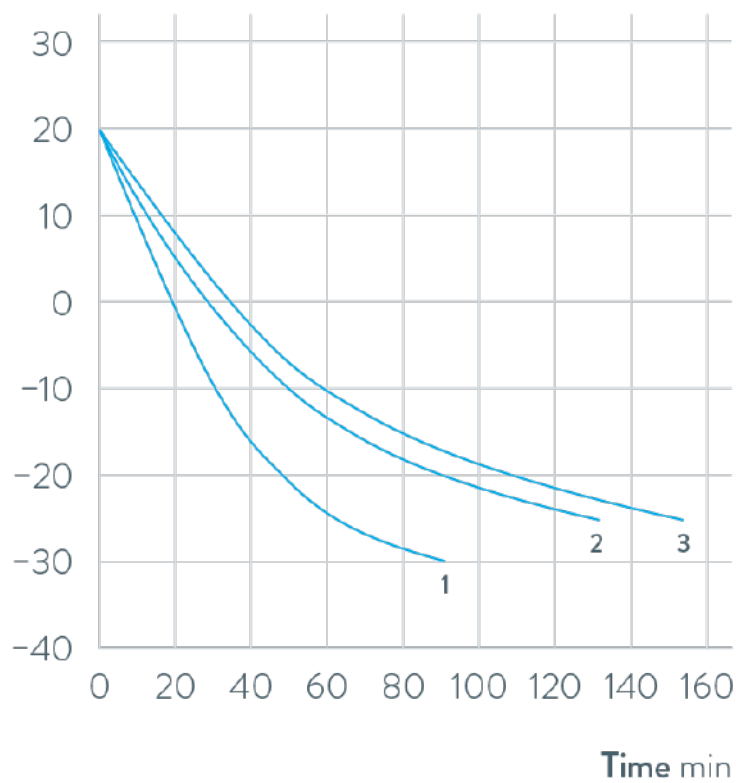

- 1 U 830 E
- 2 U 1225 E
- 3 U 1625 E


## PRODUCT DATA SHEET

Published: 2026-03-18

LAUDA Universa U 830 E

Cooling thermostat 220-240 V; 50/60 Hz

Part Number: L003971

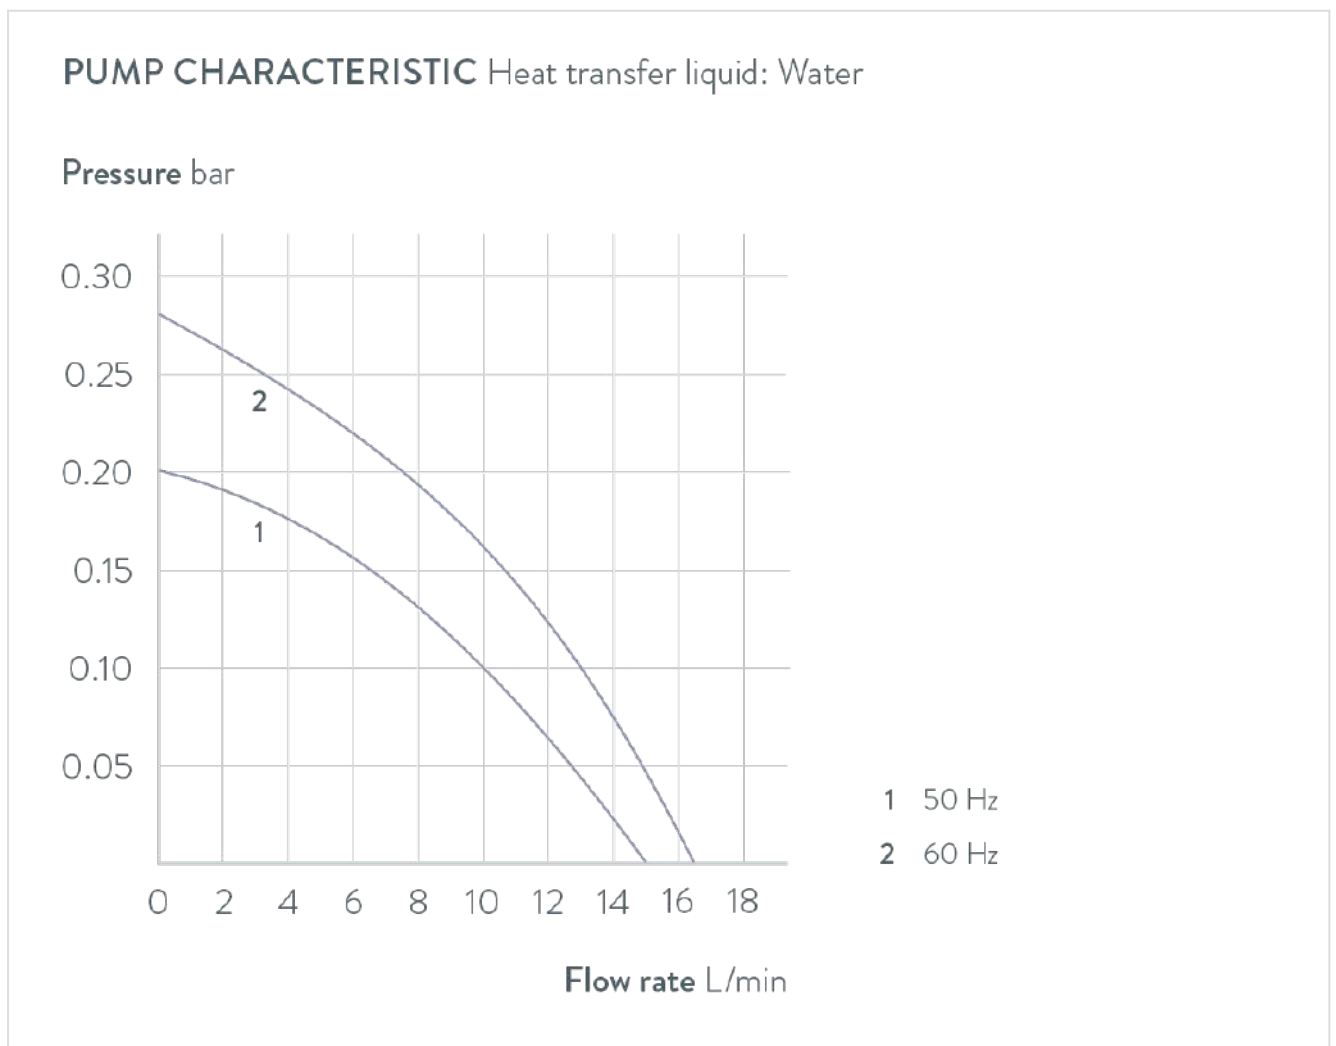

Reserve technical changes



**JOINTLAB.COM**

Jointlab S.r.l.

Via C. Treves 57, Trezzano sul Naviglio (Mi)

+39 0239310823 - info@frigolab.it