


ARS12PVDR

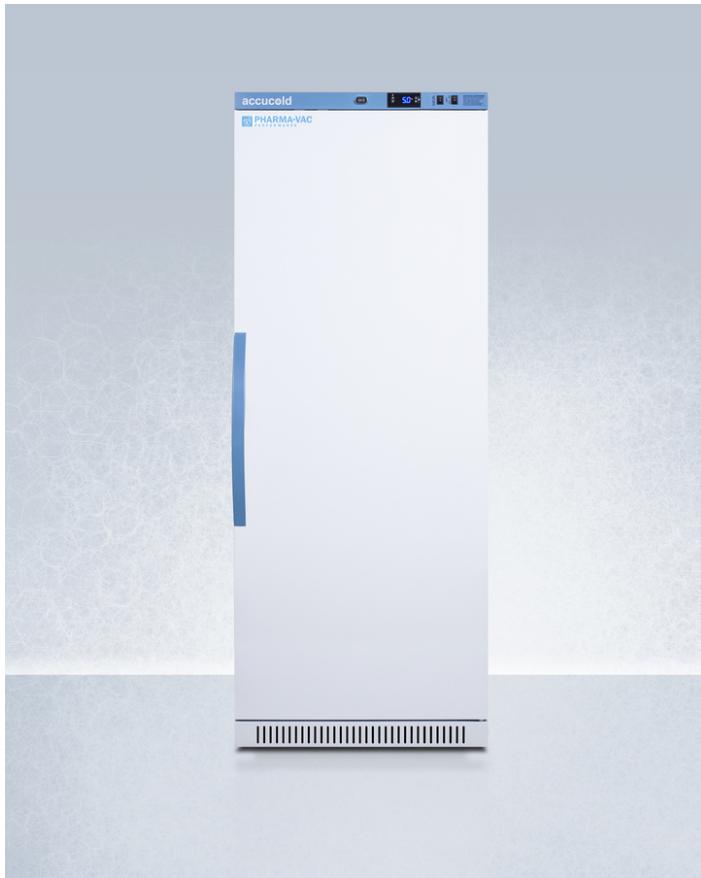

61.75" x 23.38" x 24.38" (H x W x D)

Performance series Pharma-Vac 12 cu.ft. upright all-refrigerator for vaccine storage with six ventilated removable drawers, antimicrobial silver-ion handle, and hospital grade cord with 'green dot' plug

Highlights:

Intelligent microprocessor digital temperature controller

Improved temperature accuracy with a separate temperature probe for continuous product readout to simulate stored product temperature

Powder-coated handle with naturally occurring silver ions to help reduce germ spread


Product Features:

Purpose-built design	Designed and purpose-built for pharmacy, medication, and vaccine applications to support meeting CDC/VFC guidelines
+/-1°C Variation	The published temperature variation is derived from the maximum deviation of an NTC sensor in a 1 oz. vial located nearest the chamber geometric center during a 24 hour test period
Antimicrobial silver ion-coated handle	Powder-coated handle with naturally occurring silver ions to help reduce the spread of germs
Adjustable temperature	Intuitive controls let you adjust the interior temperature between +2 to +8°C
Full-extension ventilated drawers	Six drawers made from powder-coated aluminum glide out smoothly for convenient storage, with perforated bottoms to ensure proper air circulation
Removable drawers	Drawers can be easily removed for convenient transporting of contents to a lab counter or work station
Temperature alarm	Visual and audible alarms alert if the interior temperature rises or falls out of set range
Remote alarm contacts	Electronic controller is equipped with a volt-free contact for alarm forwarding to an external remote system (contacts located in the external rear of the unit)
Automatic defrost with adjustable cycle defrost	Adjustable cycle defrost operation ensures the unit avoid temperature spikes and ice buildup

ARS12PVDR Specifications:

Overview	
Height of Cabinet	61.75" (157 cm)
Width	23.38" (59 cm)
Width with Door Open	23.88" (61 cm)
Depth	24.38" (62 cm)
Depth with Handle	26.13" (66 cm)
Depth with door at 90°	46.5" (118 cm)
Capacity	12.0 cu.ft. (340 L)
Defrost Type	Automatic
Door	White
Cabinet	White
US Electrical Safety	ETL
Canadian Electrical Safety	ETL-C
Amps	1.4
Voltage/Frequency	115 V AC/60 Hz
Weight	214.0 lbs. (97 kg)
Shipping Weight	232.0 lbs. (105 kg)
Parts & Labor Warranty	2 Years
Compressor Warranty	5 Years
UPC	761101075198
Refrigerator Features	
Door Swing	RHD
Reversible	Yes
Shelf Type	Drawers
Shelf Qty	6
Adjustable Shelves	Yes
Thermostat Type	Digital
Fan Type	Interior
Refrigerant Type	R600a
Refrigerant Amount	2.11oz.
Interior Light	Yes
Temperature Range	2 to 8°C
Dimensions	
Interior Height	53.0" (135 cm)
Interior Width	20.0" (51 cm)
Interior Depth	17.0" (43 cm)
Compressor Step Height	6.5" (17 cm)
Compressor Step Width	20.0" (51 cm)

Compressor Step Depth

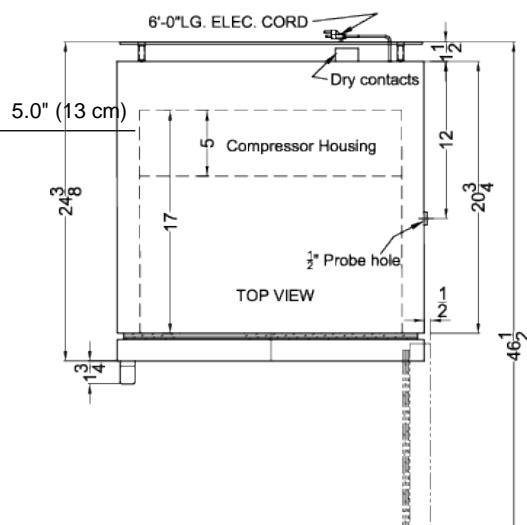

6'-0"LG. ELEC. CORD

5.0" (13 cm)

24 3/8

13

14

12

1

2

3

20 3/4

1

2


46 1/2

Dry contacts

Compressor Housing

1 1/2" Probe hole

TOP VIEW

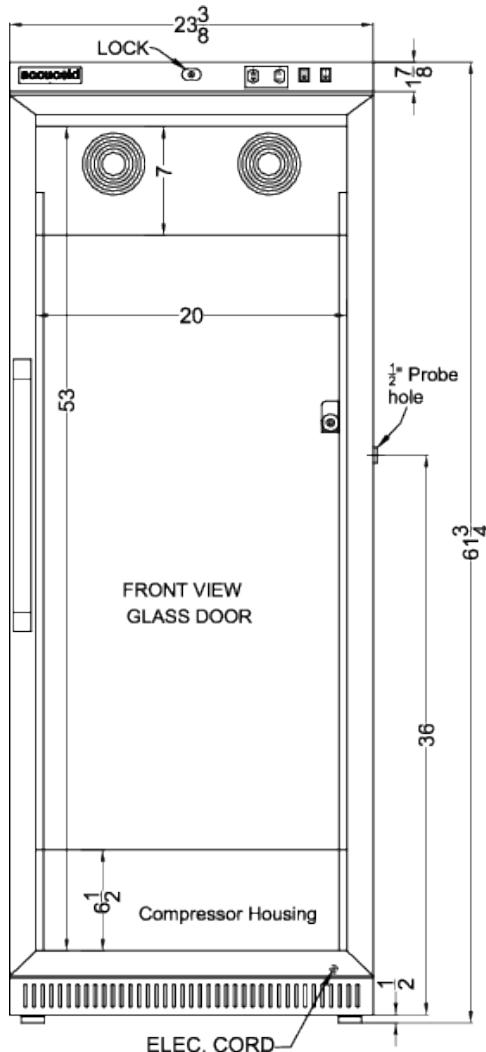

LOCK

23 3/8

17 1/8

7

20

53

1 1/2" Probe hole

36 3/4

2

1 1/2

Compressor Housing

ELEC. CORD