



# COURIER™ 5000

Shipping Scales



## ***Low-Profile Scales Ideal for General Shipping and Animal Weighing Applications***

The Courier 5000 Series shipping scales feature a sturdy low-profile design with stainless steel top, making them tough enough for shipping applications, and easy to clean for small veterinary applications. Data is clearly legible on a large, bright 28 mm display, and UPS system communication protocol is included. Our proprietary Weight Alert™ mode will warn users if packages are too heavy, for example, to be sent by post or truck.

### ***Unique Features:***

- Easy-to-use scales for general shipping use with painted steel base. Stainless steel pan holds up to daily use and is easy to keep sanitary. Adjustable display for mounting to adapt to your workspace.
- The Dynamic Weighing/Display Hold application is ideal for large boxes and packages as it retains weight data on the display - also ideal for animals in veterinary use.
- AC adapter power included. Simple USB type C for data and power connection –includes UPS software protocol string. Can also run using disposable battery power.



**JOINTLAB.COM**

Jointlab S.r.l.


Via C. Treves 57, Trezzano sul Naviglio (Mi)  
+39 0239310823 - [info@frigolab.it](mailto:info@frigolab.it)

# COURIER™ 5000 Shipping Scales

## Specifications

Model	i-C52M6R	i-C52M15R	i-C52M30R	i-C52M50R	i-C52M50L	i-C52M100L	i-C52M200L	i-C52M200X
Capacity x Default Readability	6 kg x 0.002 kg 6 000 g x 2 g	15 kg x 0.005 kg 15,000 g x 5 g	30 kg x 0.01 kg 30 000 g x 10 g	50 kg x 0.02 kg 50 000 g x 20 g	100 kg x 0.05 kg		200 kg x 0.1 kg	
Maximum Displayed Resolution	1:3 000			1:2 500		1:2 000		
Weighing Units			kg, g, lb, oz, lb:oz (kg, lb, oz, lb:oz for models above 100 kg)					
Application Mode			Weighing, Dynamic Weighing/Display Hold, Totalization, Weight Alert™					
Display			28 mm digit height, 5-digit, 7-segment LCD display with white backlight					
Keyboard			4 mechanical function keys					
Construction			ABS Plastic Indicator Housing Painted steel base with stainless steel platform (adjustable feet for L and X bases)					
Cable Length			2 m (full extension)					
Stabilization Time			1 second					
Power		AC Power adapter: 100-240VAC ~ 0.5A 50/60Hz; Power output: 5.0 VDC 1.0 A (included) or Dry cell battery: 3 x AA (LR6) Batteries (not included) Battery life: 100 hours continuous use with backlight off						
Zero Range			2% or 100% of capacity					
Interface			Standard USB Type-C					
Operating Temperature Range			-10 °C to 40 °C					
Safe Overload Capacity			150% of capacity					
Platform Dimensions (L x W x H)	329 x 319 x 43.5 mm			520 x 400 x 52.9 mm			900 x 600 x 50.9 mm	
Net Weight	4.1 kg			8.5 kg			17.4 kg	
Shipping Weight	4.8 kg			9.5 kg			19.2 kg	
Shipping Dimensions	395 x 385 x 155 mm			600 x 485 x 100 mm			985 x 680 x 105 mm	

## Abmessungen

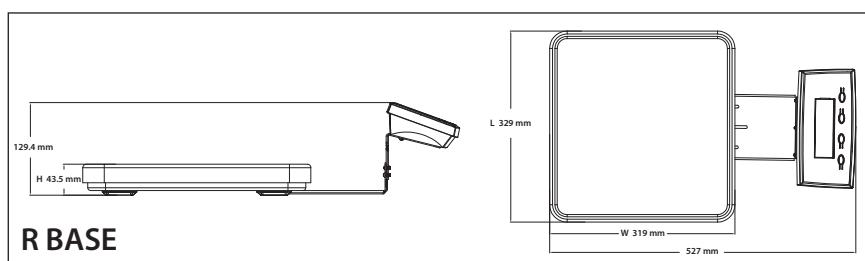

## Compliance

- **Product Safety:** IEC/EN 61010-1; UL certified power supply
- **Electromagnetic Compatibility:** IEC/EN 61326-1 Class B, basic environments; FCC Part 15 Class A; Canada ICES-003 Class A
- **Compliance Marks:** CE, UKCA
- **Other:** WEEE, RoHS

## Accessories

Remote Column Kit 980 mm Painted Steel ..... 30795819  
 Spiral cable connection base to indicator 9m max i-C51 i-C31 ..... 30809920  
 Remote Column Kit 330 mm Painted Steel ..... 30800931  
 Rubber Mat Kit Antiskid for X base ..... 30548975

